

LED RHYTHM

LED
PRECISE, HIGH-OUTPUT LIGHTING

Aether

300W, 500W

- High consistency color temperature control, no yellow edge or warm color, ensures uniform light throughout the game, enhances gaming experience.
- 30-second quick maintenance, open the cover to replace the power supply or LED module, no tools required, reducing downtime.
- Professional reflective optical design, soft light without glare, meets sports lighting standards.
- Hidden wiring + waterproof sealing, IP66 protection level, eliminates the risk of water ingress.



High consistency color temperature control, no yellow edge or warm color, ensures uniform light throughout the game, enhances gaming experience.

30-second quick maintenance, open the cover to replace the power supply or LED module, no tools required, reducing downtime.

Professional reflective optical design, soft light without glare, meets sports lighting standards.


ORDERING INFORMATION

ITEM	POWER	CCT	OPTICS	INPUT PWR	Housing Material	DIMMING	FIELDS APPLICATION
Aether	300W 500W	3000K 4000K 5000K 5700K	Asymmetric 50°	100-277/ 277-480 VAC	Die cast aluminum	0/1-10V Dimmable Optional	Stadium

NOTES

- 80 CRI Standard
- Custom RAL Colors Require Additional Costs & Lead Times
- CM Mounting Standard

OPTICS

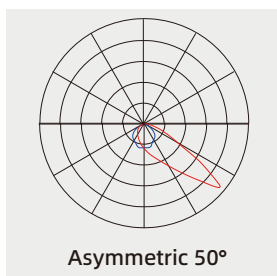

Due to continuous improvement and innovation, product appearance and specifications may change without notice. Actual performance may differ as a result of end-user environment and application.

EMAIL:SERVICE2-MARKET@LED RHYTHM.COM | WEBSITE:WWW.LED RHYTHM.COM

Aether

STADIUM SERIES

SPECIFICATIONS

Expected Life | Over 50,000 hrs.

Color Rendering Index (CRI) | >70

Operating Temp | -30°C – +50°C

Relative Humidity | 0-90% RH

Power Factor | $\geq 95\%$

Input Volt | 100-277/277-480 VAC

Frequency | 50/60 Hz

LED Chips | OSRAM

DIMMING | 0/1-10V Optional

LED Efficiency

- 140 lm/w

WARRANTY

SEE WEBSITE FOR DETAILS

5-Year

MATERIALS

Housing | Die cast aluminum


Finish | Protective UV Stabilized

Powdercoat 4000 Hour Salt

Spray Tested to ASTM B117

Reflector | Mirror aluminum

DIAMENSIONS

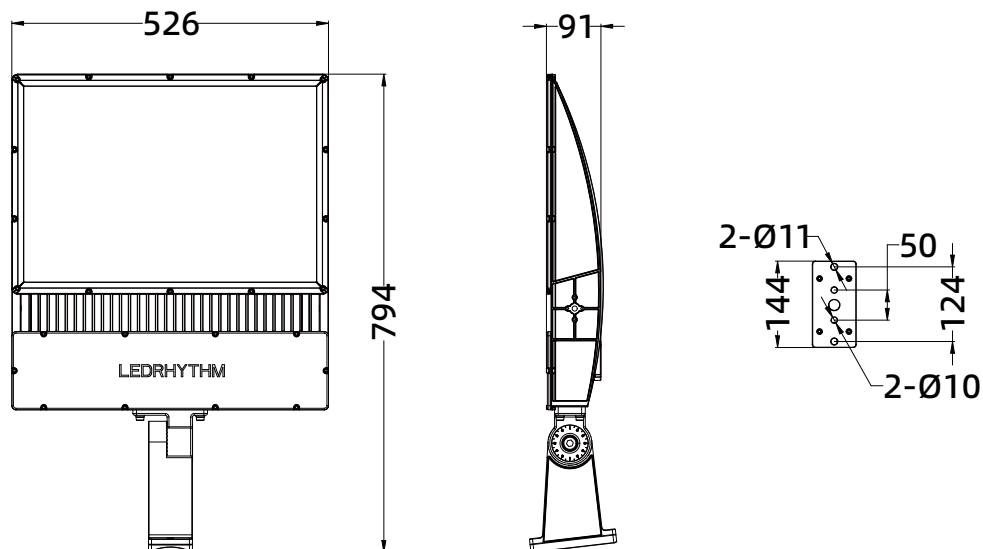

Due to continuous improvement and innovation, product appearance and specifications may change without notice. Actual performance may differ as a result of end-user environment and application.

EMAIL: SERVICE2-MARKET@LEDRHYTHM.COM | WEBSITE: WWW.LEDRHYTHM.COM